-?T
In: DC 24 V
Out: DC 24 V/15 A
SCHUTZART IP20

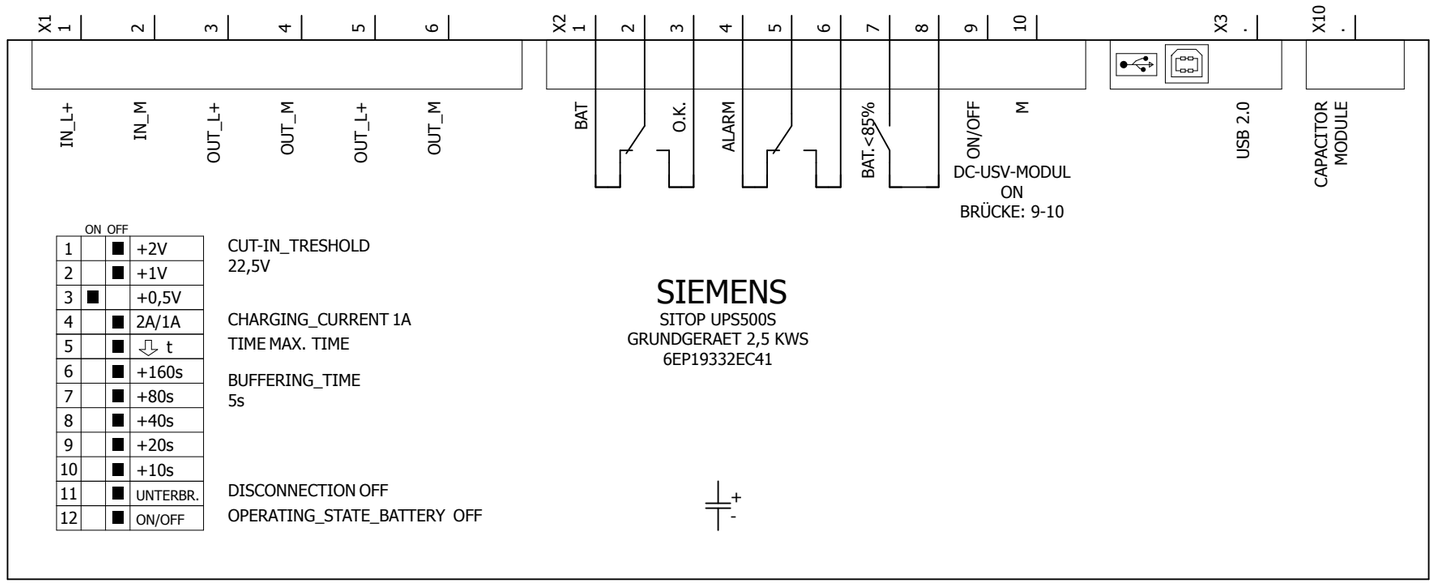

	ON	OFF		
1		■	+2V	CUT-IN_TRESHOLD 22,5V
2		■	+1V	
3	■		+0,5V	
4		■	2A/1A	CHARGING_CURRENT 1A
5		■	⇩ t	TIME MAX. TIME
6		■	+160s	BUFFERING_TIME 5s
7		■	+80s	
8		■	+40s	
9		■	+20s	
10		■	+10s	
11		■	UNTERBR.	DISCONNECTION OFF
12		■	ON/OFF	OPERATING_STATE_BATTERY OFF

SIEMENS AG	6EP1933-2EC41_UWD_IEC
	FORMAT / SIZE: ISO DIN A3 QUER H420mmxB297mm RASTER 4,00 mm