-?T
In: DC 24 V
Out: DC 24 V/15 A
SCHUTZART IP20

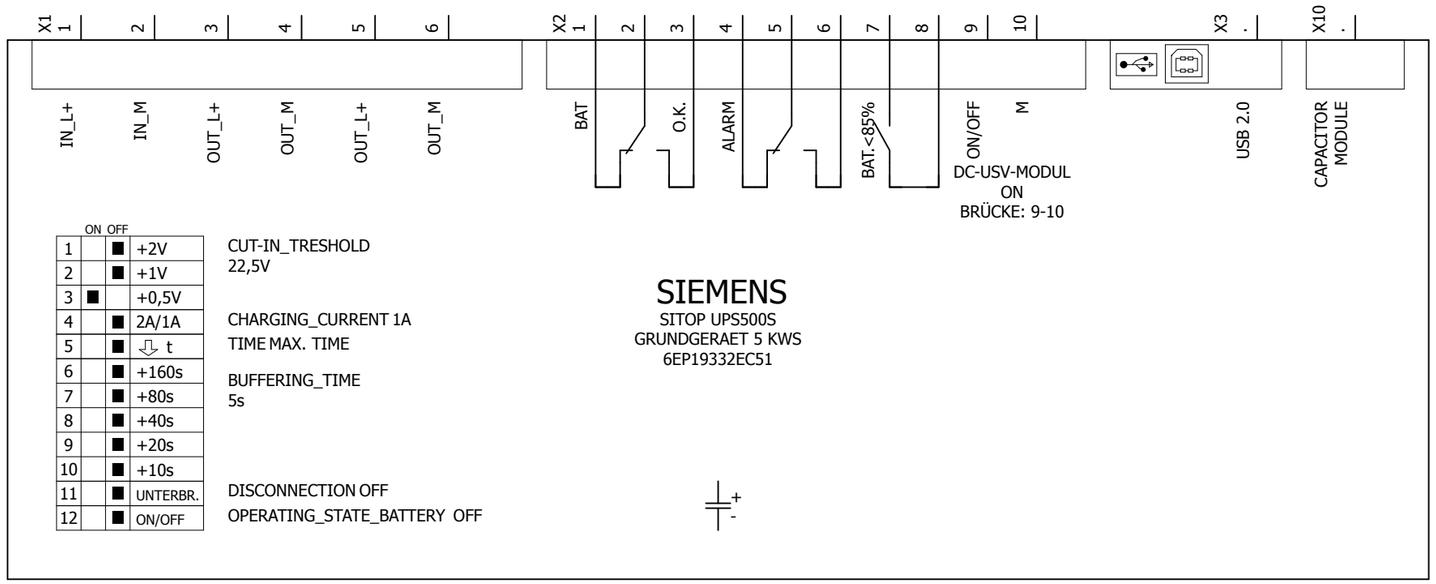


| | ON | OFF | | |
|---|---|---|---|---|
| 1 | | ■ | +2V | CUT-IN_TRESHOLD 22,5V |
| 2 | | ■ | +1V | |
| 3 | ■ | | +0,5V | |
| 4 | | ■ | 2A/1A | CHARGING_CURRENT 1A |
| 5 | | ■ | ⇩ t | TIME MAX. TIME |
| 6 | | ■ | +160s | BUFFERING_TIME 5s |
| 7 | | ■ | +80s | |
| 8 | | ■ | +40s | |
| 9 | | ■ | +20s | |
| 10 | | ■ | +10s | |
| 11 | | ■ | UNTERBR. | DISCONNECTION OFF |
| 12 | | ■ | ON/OFF | OPERATING_STATE_BATTERY OFF |

| | |
|---|---|
| SIEMENS AG | 6EP1933-2EC51_UWD_IEC |
| | FORMAT / SIZE: ISO DIN A3 QUER H420mmxB297mm<br>RASTER 4,00 mm |